

No one does it  
like you

Canon

# AMAZING PERFORMANCE DAY IN, DAY OUT.

Reliable devices that will meet and exceed your day-to-day needs, the imageRUNNER ADVANCE DX 4700i Series devices are flexible, versatile and suited to a range of different environments.



## Canon imageRUNNER ADVANCE DX 4700i Series

### COST CONTROL

Improve cost management in the workplace with strategic operation efficiencies

- Forced Job Hold reduces paper and toner wastage.
- Ability to change print settings at device for controlled output.
- Blank page removal comes standard and works to reduce paper wastage.
- Track usage and control your costs utilising Canon's uniFLOW Online Express free software.

### MOBILITY

Advanced Mobile OS Support empowers workers through freedom and flexibility

- Mobile workflows are set up to easily allow users to connect, print, scan and capture using Canon PRINT Business.
- Full support for Apple® and Android™ Mobile Printing.
- Simple and easy mobile connectivity with in-built WiFi plus options to connect through Bluetooth and Near Field Communication (NFC).

### SECURITY

Safeguard data and ensure sensitive information remains secure

- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Integrates with existing, third-party Security Information and Event Management (SIEM) systems to help provide real-time comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialise without alterations or tampering.

### PERFORMANCE

Save time and resources thanks to advanced usability functions

- Standard Universal Send Advanced Feature Set enables you to send documents in Trace & Smooth PDF, OCR compatible PDF/XPS/OOXML.
- Single pass duplex scanning ADF enables high-speed scanning of 270 ipm (300 dpi, two-sided scanning).
- Large 10.1 inch WSVGA full colour touch screen for a user-friendly experience.
- High-capacity paper-handling abilities for a wide range of sizes and paper types.
- Optional Inner Finisher incorporates Eco Staple, Staple, and Staple On-demand functions.

### INTEGRATION

Seamlessly integrate with key line-of-business systems

- Seamlessly integrate with key line-of-business systems to power your digital transformation journey.
- Personalised workflows give users the ability to take control of the way they want to manage their information.
- Leverage Canon's Multifunctional Embedded Application Platform (MEAP) to optimise processes with a range of powerful document, capture and output management solutions.
- Scan to myself and Google Drive™ plus other popular cloud destinations to enhance workflow efficiencies\*.

### SUSTAINABILITY

Incorporating responsible design and efficient operation to help achieve environmental goals

- Motion sensor/sleep recovery triggers contribute to reducing energy emissions.
- Low energy consumption works consistently while machines are operating.
- Machines are made with recycled plastics and bio-based plastics.
- EPEAT® rated and ENERGY STAR® qualified.


\* Requires uniFLOW Online Express or uniFLOW Online subscription.

# DEVICE SECURITY


The imageRUNNER ADVANCE DX 4700i Series feature the ability to help verify that the device boot process, firmware, and applications initialise at startup, without any alterations or tampering by malicious third parties.

During operation, McAfee Embedded Control™ utilises a whitelist to protect against malware and tampering of firmware and applications.\*\*

## VERIFY SYSTEM AT STARTUP

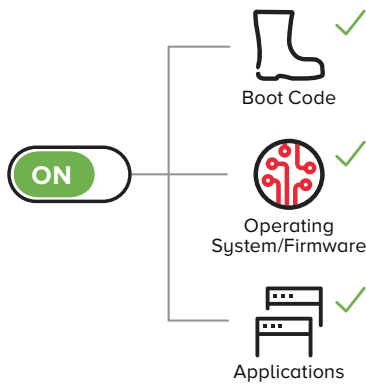

## McAFEE EMBEDDED CONTROL™

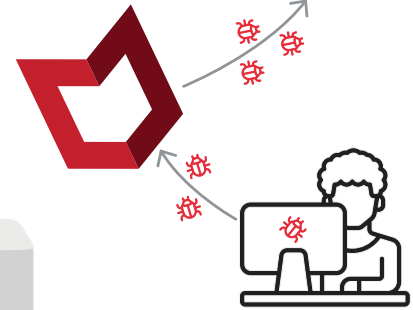

# CONFIGURATION

\*\* These features are available on third generation imageRUNNER ADVANCE Gen III Series III or imageRUNNER ADVANCE DX models only. McAfee Embedded Control™ requires Unified Firmware Platform v3.9 or above.

### Booklet Finisher

- 2-tray, 3,250 sheet capacity
- Corner and double stapling up to 50 sheets (80 gsm)
- Booklet-making up to 20 sheets and non-staple saddle folded capacity up to 3 sheets (A3/A4R)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On-demand 50 sheets (80 gsm)
- Supports optional internal 2/3, 2/4 and 4 hole inner punchers

### Inner 2Way Tray

- Separates copies, prints and faxes
- Adds a second internal output tray

### Utility Tray

### Paper Deck Unit

- Supports up to A4
- Media weight 60 to 128 gsm
- 2,700 sheets (80 gsm)

### Staple Finisher

- 2-tray, 3,250 sheet capacity
- Corner and double stapling up to 50 sheets (80 gsm)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On-demand 50 sheets (80 gsm)
- Supports optional internal 2/3, 2/4 and 4 hole inner punchers

### Buffer Pass Unit

- Transports paper to external finisher

### Inner Finisher

- 2-tray, 545 sheet capacity
- Corner and double stapling up to 50 sheets (80 gsm)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On-demand 40 sheets (80 gsm)
- Supports optional internal 2/3, 2/4 and 4 hole inner punchers

### Cassette Feeding Unit

- Supports up to A3
- Media weight 60 to 128 gsm
- 2 x 550 sheets (80 gsm)

### High Capacity Cassette Feeding Unit

- Supports up to A4
- Media weight 60 to 128 gsm
- 2,450 sheets (80 gsm)

# imageRUNNER ADVANCE DX 4700i Series SPECIFICATIONS



Main Unit	
Machine Type	A3 Monochrome Laser Multifunctional
Core Functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.75GHz Dual Core Processor
Control Panel	Standard: 10.1" TFT LCD WSVGA Colour Touch Panel
Memory	Standard: 3.0 GB RAM
Hard Disk Drive	Standard*: 320 GB (available disk space: 250 GB) Optional: 250 GB, 1 TB * A different initial HDD may be used.
Mirroring Hard Disk Drive	Optional
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy Others: Standard: USB 2.0 (Host) x 1, USB 3.0 (Host) x 1, USB 2.0 (Device) x 1 Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80 gsm)	Standard: 1,200 Sheets 100-sheet Multi-purpose Tray x 1 550-sheet Cassette x 2 Maximum: 6,350 Sheets (with High Capacity Cassette Feeding Unit-B1 and Paper Deck Unit-F1)
Paper Output Capacity (A4, 80 gsm)	Standard: 250 Sheets Maximum: 3,350 Sheets (with Buffer Pass-N1 + Staple Finisher-Y1 or Booklet Finisher-Y1)
Finishing Capabilities	Standard: Collate, Group With Options: Collate, Group, Offset, Staple, Hole Punch, Saddle Stitch, Eco Staple, Staple On-demand
Supported Media Types	Multi-purpose Tray: Thin, Plain, Heavy, Colour, Recycled, Pre-punched, Transparency, Tracing, Label, Bond, Envelope Upper/Lower Cassette: Thin, Plain, Heavy, Colour, Recycled, Pre-punched
Supported Media Size	Multi-purpose Tray: Standard Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size/Free Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Envelope: COM10 No.10, Monarch, DL, ISO-C5 Envelope Custom Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Upper Cassette: Standard Size: A4, A4R, A5R, B4, B5, B5R Custom Size: 139.7 x 182.0 mm to 297.0 x 390.0 mm Lower Cassette: Standard Size: A3, A4, A4R, A5R, B4, B5, B5R Custom Size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Envelope*: COM10 No.10, Monarch, DL, ISO-C5 * Envelope Feeder Attachment-D1 is required.
Supported Media Weights	Multi-purpose Tray: 52 to 220 gsm* * Thin (52 to 59 gsm): Vertical Grain Paper Feed Only Upper/Lower Cassette: 60 to 220 gsm Duplex: 60 to 105 gsm
Warm-up Time	Quick Startup Mode: 4 seconds or less* * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 seconds or less From Power-on: 24 seconds or less* * Time from device power-on, until copy ready (not print reservation).
Dimensions (W x D x H)	With Single Pass DADF-C1: 608 x 722 x 932 mm
Installation Space (W x D)	Fully Configured: 1,811 x 1169 mm (with Single Pass DADF-C1 + Paper Deck Unit-F1 + Booklet Finisher-Y1 with Extension Tray Extended and Saddle Unit Drawn)
Weight	IR-ADV DX 4751i/4735i/4725i: With Single Pass DADF-C1: Approx. 89.0 kg Including Toner IR-ADV DX 4725i: With Single Pass DADF-C1: Approx. 87.9 kg Including Toner

Print Specifications	
Print Speed	IR-ADV DX 4751i: Up to 51 ppm (A4), Up to 37 ppm (A4R), Up to 25 ppm (A3), Up to 20 ppm (A5R) IR-ADV DX 4735i: Up to 35 ppm (A4), Up to 32 ppm (A4R), Up to 22 ppm (A3), Up to 20 ppm (A5R) IR-ADV DX 4725i: Up to 25 ppm (A4), Up to 17 ppm (A4R), Up to 15 ppm (A3), Up to 17 ppm (A5R)
Print Resolution (dpi)	1,200 x 1,200
Page Description Languages	Standard: UFR II, PCL6 Optional: Adobe® PostScript® 3™
Direct Print	Supported File Types: PDF, EPS, TIFF/JPEG, and XPS
Printing from Mobile and Cloud	AirPrint®, Mopria™, Google Cloud Print™, Canon Business Print, and uniFLOW Online. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Fonts	PS Fonts: 136 Roman PCL Fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T <sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts <sup>2</sup> <sup>1</sup> Optional PCL International Font Set-A1 is required. <sup>2</sup> Optional Barcode Printing Kit-D1 is required.
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System As of July, 2019	UFR II: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PCL: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019 PS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X (10.9 or later)

Copy Specifications	
Copy Speed	IR-ADV DX 4751i: Up to 51 ppm (A4), Up to 37 ppm (A4R), Up to 25 ppm (A3), Up to 20 ppm (A5R) IR-ADV DX 4735i: Up to 35 ppm (A4), Up to 32 ppm (A4R), Up to 22 ppm (A3), Up to 20 ppm (A5R) IR-ADV DX 4725i: Up to 25 ppm (A4), Up to 17 ppm (A4R), Up to 15 ppm (A3), Up to 17 ppm (A5R)
First-Copy-Out Time (A4)	IR-ADV DX 4751i: Approx. 3.7 seconds or less IR-ADV DX 4735i: Approx. 3.8 seconds or less IR-ADV DX 4725i: Approx. 5.2 seconds or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 9,999 Copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable Zoom: 25%–400% (1% Increments) Preset Reduction/Enlargement: 25%, 50%, 61%, 70%, 81%, 86%, 100% (1%), 115%, 122%, 141%, 200%, 400%
Copy Features	Preset R/E Ratios by Area, Two-sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store In Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved Copy, Copy Sample

Scan Specifications	
Type	Single Pass DADF-C1* * Detect Feeder Multi Sheet Feed is supported.
Document Feeder Paper Capacity (80 gsm)	Single Pass DADF-C1: Up to 200 Sheets
Acceptable Originals and Weights	Single Pass DADF-C1*: 1-sided Scanning: 38 to 220 gsm 2-sided Scanning: 38 to 220 gsm * An acceptable weights of A6R or smaller is 50 to 220 gsm.
Supported Media Size	Single Pass DADF-C1: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R, Custom Size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
Scan Speed (ipm: BW/CL: A4)	Single Pass DADF-C1: 1-sided Scanning: 135/135 (300 x 300 dpi, Send), 80/80 (600 x 600 dpi, Copy) 2-sided Scanning: 270/270 (300 x 300 dpi, Send), 160/90 (600 x 600 dpi, Copy)
Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Pull Scan Specifications	Colour Network ScanGear2, For both TWAIN and WIA Supported OS: Windows® 7/ 8.1/ 10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Box, Scan to Network, Scan to USB Memory Key, Scan to Mobile Device, Scan to Cloud (uniFLOW Online)

Send Specifications	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax
Address Book	LDAP (2,000)/Local (1,600)/Speed Dial (200)
Send Resolution (dpi)	Push: Up to 600 x 600 Pull: Up to 600 x 600
Communication Protocol	File: FTP (TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/Fax: SMTP, POP3
File Format	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply Policy, Optimise for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

Fax Specifications	
Maximum Number of Connection Lines	4
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	Sending: A3, A4, A4R, A5 <sup>1</sup> , A5R <sup>1</sup> , B4, B5 <sup>1</sup> , B5R <sup>1</sup> Receiving: A3, A4, A4R, A5R, B4, B5, B5R <sup>1</sup> Sent as A4 <sup>2</sup> Sent as B4 Short
Fax Memory	Up to 30,000 Pages (2,000 Jobs)
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 Dials
Sequential Broadcast	Max. 256 Addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

Store Specifications	
Mail Box (Number Supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 Jobs) Stored
Advanced Box	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3
Advanced Box Available Disc Space	Standard: 16 GB (With Option: Max. 480 GB)
Advanced Box Features	Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to Public, URI TX, Backup/Restore

Security Specifications	
Authentication and Access Control	Standard: User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print <sup>1</sup> ), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File Send Functions, Confirming FAX Number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) <sup>1</sup> Requires uniFLOW Online/uniFLOW
Network Security	TLS 1.3, IPsec, IEEE802.1X Authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX Separation from LAN, USB Port Separation from LAN, Prohibit the Execution of Files Stored in Advanced Box in the MFP, Scan and Send-virus Concerns for E-mail Reception
Device Security	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialisation, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection),
Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

Environmental Specifications	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power Source	220–240 V, 50–60 Hz, 5.6 A
Power Consumption	Maximum: Approx. 1,500 W Standby: Approx. 38 W <sup>1</sup> Sleep Mode: Approx. 0.9 W <sup>2</sup> <sup>1</sup> Reference Value: Measured One Unit <sup>2</sup> 0.9 W sleep mode may not be possible in all circumstances due to certain settings.

## Consumables

Toner Cartridge/s	NPG-73 Toner BK
Toner (Estimated Yield @ 6% Coverage)	NPG-73 Toner Black: 42,100 Pages

## Software and Printer Management

Tracking and Reporting	Universal Login Manager (ULM), uniFLOW Online Express
Remote Management Tools	eMaintenance, Content Delivery System
Scanning Software	Network ScanGear
Optimisation Tools	Canon Driver Configuration Tool, NetSpot Device Installer
Platform	MEAP (Multifunctional Embedded Application Platform)

## Paper Supply Options

Cassette Feeding Unit-AN1	Paper Capacity: 550 Sheets x 2 (80 gsm) Paper Type: Thin, Plain, Heavy, Colour, Recycled, Pre-punched Paper Size: A3, A4, A4R, A5R, B4, B5, B5R Custom Size: 139.7 x 182.0 mm to 297.0 to 390.0 mm Paper Weight: 60 to 220 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit) Weight: Approx. 23.5 kg
High Capacity Cassette Feeding Unit-B1	Paper Capacity: 2,450 Sheets (80 gsm) Paper Type: Thin, Plain, Heavy, Colour, Recycled, Pre-punched Paper Size: A4 Paper Weight: 60 to 220 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit) Weight: Approx. 28.0 kg
Paper Deck Unit-F1	Paper Capacity: 2,700 Sheets (80 gsm) Paper Type: Thin, Plain, Heavy, Colour, Recycled, Pre-punched Paper Size: A4, B5 Paper Weight: 60 to 128 gsm Power Source: From the Main Unit Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit) Weight: Approx. 31.0 kg

## Output Options\*

\* Paper capacity may vary with different of paper type/size.

Inner 2Way Tray-L1	Tray Capacity (with 80 gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: 100 Sheets A3, A4R, B4, B5R: 50 Sheets Lower tray: A4, B5: 250 Sheets A3, A4R, A5, A5R, A6R, B4, B5R: 100 Sheets Paper Weight: 52 to 220 gsm Dimensions (W x D x H): 426 mm x 413 mm x 109 mm (attached to the Main Unit) Weight: Approx. 0.6 kg
Inner Finisher-J1	Tray Capacity (with 80 gsm paper): Upper Tray: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets Lower Tray: A4, A5R, B5: Approx. 500 Sheets, A3, A4R, B4, B5R: Approx. 250 Sheets, Envelope: 10 Sheets Paper Weight: 52 to 220 gsm Staple Position: Corner, Double Staple Capacity: A4, B5: 50 Sheets (52 to 90 gsm) A3, A4R, B4: 30 sheets (52 to 90 gsm) Eco Staple: A3, A4, B4, B5: 5 Sheets (52 to 64 gsm) 4 Sheets (65 to 81.4 gsm) 3 Sheets (82 to 105 gsm) Staple On-demand: 40 Sheets (80 gsm) Dimensions (W x D x H): 604 x 525 x 205 mm (when the extension tray is extended) Weight: Approx. 7.3 kg
Staple Finisher-Y1 (External)	(Requires Buffer Pass Unit-N1) Tray Capacity (with 80 gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: 250 Sheets, A3, A4R, B4, B5R: 125 Sheets Lower Tray: A4, A5, A5R, B5: 3,000 Sheets, A3, A4R B4, B5R: 1,500 Sheets, A6R: 250 Sheets Envelope: No.10 COM10, DL, ISO-C5: 100 Sheets, Monarch: 30 Sheets Paper Weight: 52 to 220 gsm Staple Position: Corner, Double Staple Capacity: A4, B5: 50 Sheets (52 to 90 gsm) A3, A4R, B4: 30 Sheets (52 to 90 gsm) Eco Staple: A3, A4: 5 Sheets (52 to 64 gsm) 4 Sheets (65 to 81.4 gsm) 3 Sheets (82 to 105 gsm) Staple On-demand: 50 Sheets (52 to 90 gsm) Power Source: From the Main Unit Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 31 kg

Booklet Finisher-Y1 (External)	(Requires Buffer Pass Unit-N1) (Includes the above Staple Finisher-Y1 basic staple specifications.) Saddle Stitch Paper Size: A3, A4R, B4 Saddle Stitch Staple Capacity: 20 Sheets x 10 Sets (52 to 81.4 gsm) (including 1 cover sheet up to 220 gsm) Non Staple Folded Bunch Capacity: 3 Sheets (52 to 105 gsm) Power Source: From the Main Unit Dimensions (W x D x H): 637 mm x 623 mm x 1,142 mm (when the extension tray is extended) Weight: Approx. 57 kg
Inner 2/3 Hole Puncher-C1	(Requires the Inner Finisher-J1) Two or Three Holes Acceptable Punch Paper Weight: 52 to 220 gsm Acceptable Punch Paper Size: Two Holes A3, A4, A4R, B4, B5, B5R Three Holes A3, A4, B4, B5 Power Source: From the Finisher
Inner 2/F4 Hole Puncher-C1	(Requires the Inner Finisher-J1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 220 gsm Acceptable Punch Paper Size: Two Holes A3, A4, A4R, B4, B5, B5R Four Holes A3, A4 Power Source: From the Finisher
2/3 Hole Puncher Unit-A1	(Requires the Staple Finisher-Y1 or Booklet Finisher-Y1) Two or Three Holes Acceptable Punch Paper Weight: 52 to 220 gsm Acceptable Punch Paper Size: Two Holes: A3, A4, A4R, A5, B4, B5, B5R Three Holes: A3, A4, B4, B5 Power Source: From the Finisher
2/4 Hole Puncher Unit-A1	(Requires the Staple Finisher-Y1 or Booklet Finisher-Y1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 220 gsm Acceptable Punch Paper Size: Two Holes: A3, A4, A4R, A5, B4, B5, B5R Four Holes: A3, A4 Power Source: From the Finisher

## Hardware Accessories

Card Readers	MiCard Plus for ULM
Others	Envelope Feeder Attachment D1, Utility Tray-B1, Numeric Keypad-A1

## Security Options

Data Security	HDD Mirroring Kit-J1, 2.5 inch/250 GB HDD-N1, 2.5 inch/1 TB HDD-P1
---------------	--

## System and Controller Options

Print Accessories	PCL International Font Set-A1, PS Printer Kit-BG1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Copy Control Interface Kit-A1, Serial Interface Kit-K3, Connection Kit-A2 for Bluetooth LE, NFC Kit-E1
Fax Accessories	Super G3 Fax Board-BF1, Super G3 2nd Line Fax Board-BF1, Super G3 3rd/4th Line Fax Board-AS1, Remote Fax Kit-A1, IP Expansion Kit-B1

## Other Options

Accessibility Accessories	ADF Access Handle-A1, Voice Guidance Kit-G1, Voice Operation Kit-D1
Consumables	Staple-P1, Staple Cartridge-Y1

## For information and services contact

Canon Australia Pty Ltd	1800 444 199	canon.com.au/business
Canon New Zealand Ltd	0800 222 666	canon.co.nz/business

POWERED BY  **uniFLOW**  
online  
express

*No one does it  
like you*

**Canon**